

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- ① This device may not cause harmful interference.
- ② This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



DISH4 V1.2

The User Manual of Wireless Indoor Strobe Siren




Product Overview

The wireless indoor siren is an accessory of smart alarm system. It could work for 24 months standby by 3 x AA dry cells. It is easy to set up and reliable. With core microprocessor and tamper device, it will alarm and push notifications will be showed in the App once it is tampered. And it has an indicator to show the status of alarm system. The indicator will light up once in 15 seconds in the event of low battery and push notification will be sent to the APP.

Specifications

| | |
|------------------------------------|---|
| • Power Supply | USB 5V 1A |
| • Battery | 3x AA dry cells |
| • Transmission Distance | Up to 1000m without obstacle |
| • Standby Current | ≤110μA |
| • Working Current | ≤350mA |
| • Siren Volume | 90dB@30cm |
| • Lens Color | Red/Blue/Yellow |
| • Working Temperature | -10°C~50°C |
| • Humidity | 90%rh (non-condensing) |
| • Tamper Device | Supported |
| • Prompt Tone and Voice Adjustment | Supported |
| • Battery Standby Time | 24 Months |
| • Housing Material | PC+ABS |
| • Indicator of System Status | Yes |
| • Weight | 121.0g(battery not included) 190.0g(battery included) |
| • Dimension | 121.2×88×38mm (LxWxH)(±0.1mm) |

Appearances

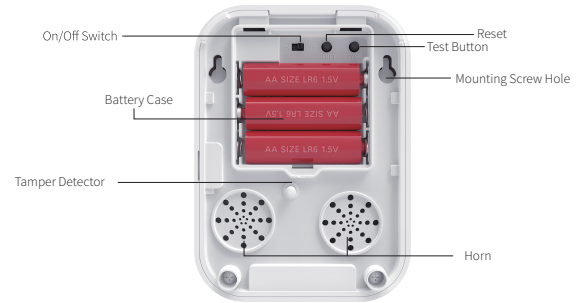


Pairing with main panel by App

- ① Install the batteries and turn on the siren. Make sure the indicator is flashing, otherwise please reset it.
- ② Scan the QR code on the siren with APP.
- ③ The pairing result can be confirmed in App and the siren will beep twice.

**Test: You can also press "Test" button in App to check whether the siren is paired successfully or not.*

Settings

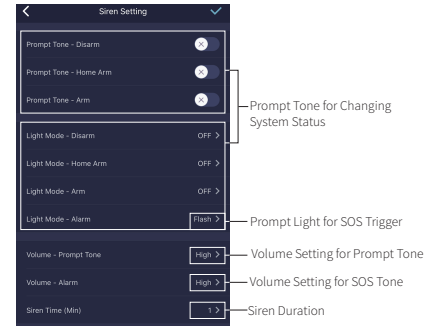

Lighting Effects(Configurable)

| Working Status | Home Arm | Arm | Disarm | SOS |
|----------------|----------------|---------------|-----------------|-----------------------|
| Lighting Modes | Flash Blue/Off | Flash Red/Off | Flash Green/Off | Flash Red Sharply/Off |