

Design pure, rectangular



Swing door with side panel

Product description



- For installation in recess and for combination with side panel or as corner entry.
- Partially framed door with one glass panel, opening inwards and outwards. When mounting with side panel for inwards opening, the supplementary set for inwards and outwards opening is required.
- Glazing with 6 mm single-pane safety glass according to DIN EN 12150, optionally with the easy-care HÜPPE Anti-Plaque surface finish.
- Profiles made of high-value anodised aluminium. Handle made of high-quality chrome-plated metal.
- Slopes possible.
- Adjustable in the wall profile 15 mm.
- Tubular hinge with continuously adjustable rise-and-fall mechanism and

- 5 mm lifting effect.
- With drip deflector strip (height 10 mm) for optimum watertightness, or as easy-entry unit.
- Continuous magnetic strips and sealing profiles, as well as water-repellent horizontal sealing strip.
- Sealing according to DIN 14428.
- Made in Germany.
- Included in delivery: Fastening materials. Installation instructions.
- Ten-year availability guarantee on wear parts after purchase of the product.
- Handle and drip deflector strip always in high-gloss silver, except for Black Edition, White Edition.

Profile set for recess installation is required for swing doors in recess or door combined with shortened side panel.

For corner solutions swing door with side panel, only outwards opening. Inwards opening also possible with inwards/outwards opening supplementary set.

Installation options 8P06	
Recess = door + profile set for recess installation	
Corner solution = door + side panel	
Corner entry = door + door	
Min.-max. dimensions	
1400-2000	500-1100

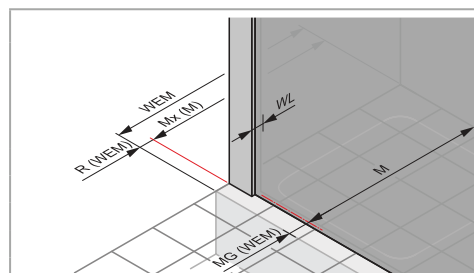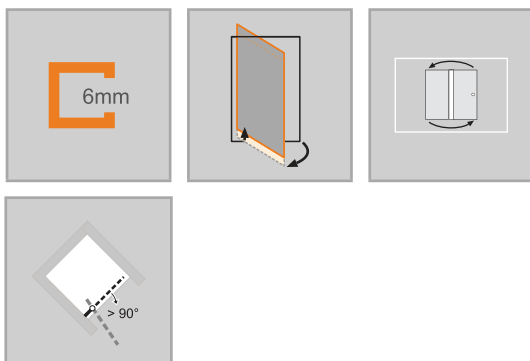

Dimensions

WL:	30
R:	15
Mx:	M+15
MG:	30

WEM = tray installation dimension (000)
 M = Installation dimension middle of glass (001)
 Please always specify when ordering.